


# CT 61

## 6 POSITION 1 WAY ROTARY SWITCHER

### DESCRIPTION

The 6 position selector CT 61 shall be matched to a RCF TL 128 line transformer, in order to get a volume control for a loudspeaker group having a total power not exceeding 120 W. All connected loudspeakers shall have 100 V line matching transformers. It includes a 24 V dc override relay to either bypass the 6 position selector or insert a second 100 V line (not affected by the volume control) for paging.

It can works with 3 wire lines as well, in order to make emergency announcements without using the internal 24 V dc relay. CT 61 can be installed on whichever supporting frame for home/office electrical systems by drilling a hole in a blank key and fixing the control circuit.

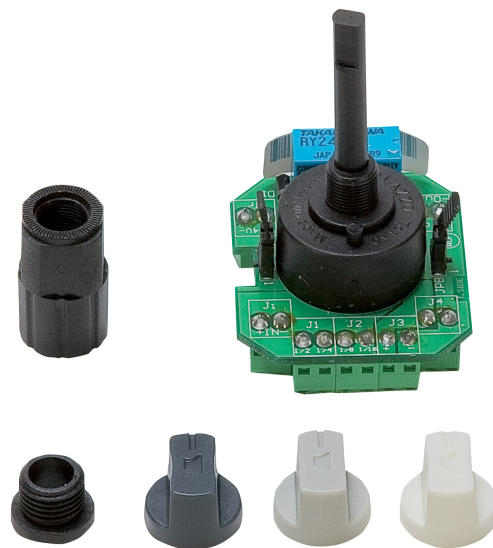

### FEATURES

- 5 selectable position + OFF volume control
- To be used with TL 128 autotransformer (not included)
- 3 knobs in different colours white, silver, anthracite included
- 24 V dc override relay to bypass the 6 position selector include

**TECHNICAL SPECIFICATIONS**

<b>General specifications</b>	Input voltage:	100 V
	Output voltage:	100 V
	Maximum power (with TL 128):	120 W
<hr/>		
<b>Standard compliance</b>	CE marking:	Yes
<hr/>		
<b>Size</b>	Height:	50 mm / 1.97 inches
	Width:	43 mm / 1.69 inches
	Depth:	68 mm / 2.68 inches
	Weight:	0.05 kg / 0.11 lbs
<hr/>		
<b>Shipping informations</b>	Package Height:	75 mm / 2.95 inches
	Package Width:	120 mm / 4.72 inches
	Package Depth:	70 mm / 2.76 inches
	Package Weight:	0.12 kg / 0.26 lbs

**PART NUMBER**

- **13160036**

CT 61

EAN 8024530006006